


Hot Rolled Sheet Pile

PZ & PS Sections




BENNETT STEEL
SUPPLY

-Call or text for Quote: 321-464-2283
-E-mail: ABennett.ReelSteel@gmail.com
-Website: www.reelsteelusa.com

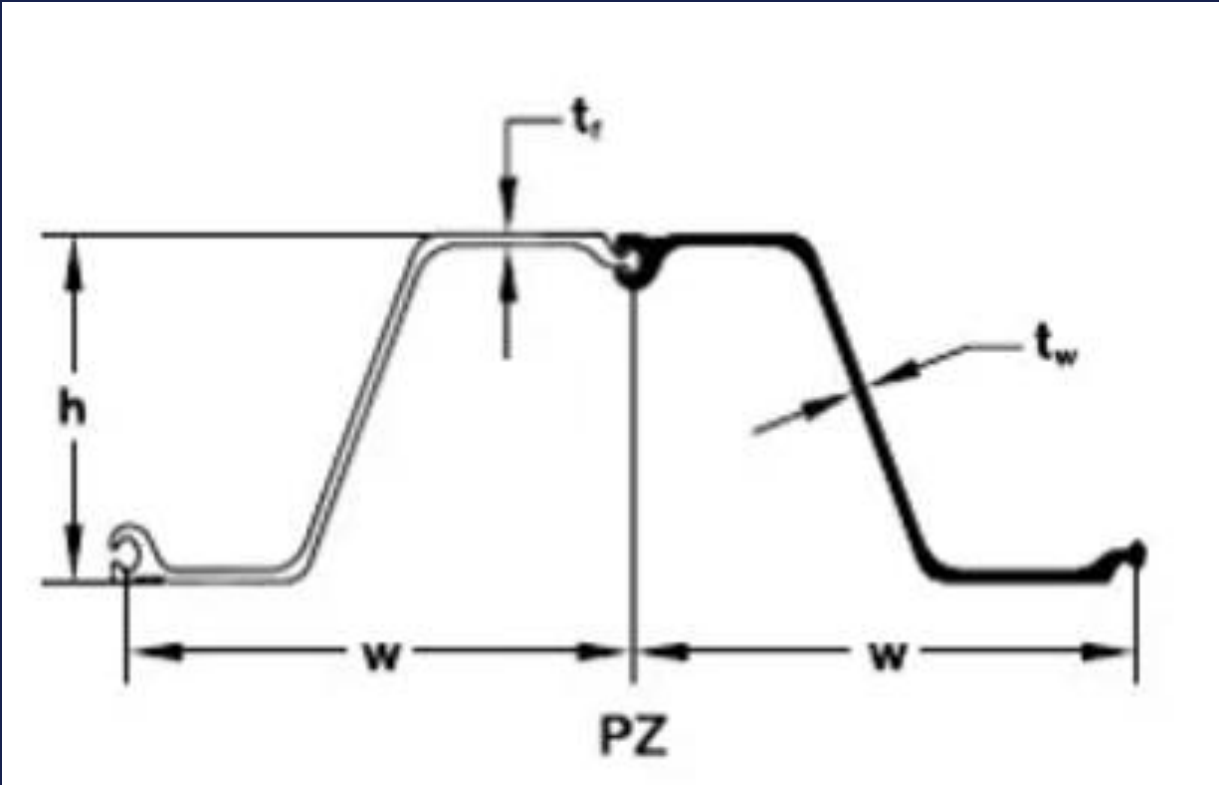

Section	Width (w) in (mm)	Height (h) in (mm)	Flange (tf) in (mm)	Wall (tw) in (mm)	Cross Sectional Area in ² /ft (cm ² /m)	Weight Pile lb/ft (kg/m)	Weight Wall lb/ft ² (kg/m ²)	Elastic Section Modulus in ³ /ft (cm ³ /m)	Plastic Section Modulus in ³ /ft (cm ³ /m)	Moment of Inertia in ⁴ /ft (cm ⁴ /m)	Coating Area Both Sides ft ² /ft (m ² /m)	Coating Area Wall Surface ft ² /ft ² (m ² /m ²)
PZ-22	22.6 (574)	15.9 (404)	0.50 (12.7)	0.35 (8.9)	22.2 (471)	61 (91)	27 (132)	30.7 (251)	36.7 (301)	244 (10,160)	3.7 (1.13)	1.2 (0.37)
PZ-27	22.6 (574)	18.0 (457)	0.50 (12.7)	0.35 (8.9)	27.2 (572)	75 (112)	33 (161)	44.1 (362)	52.7 (432)	397 (16,540)	3.7 (1.13)	1.2 (0.37)
PZ-35	22.6 (574)	22.0 (559)	0.50 (12.7)	0.35 (8.9)	34.8 (738)	96 (143)	42 (205)	69.9 (573)	83.1 (682)	768 (31,980)	3.7 (1.13)	1.2 (0.37)
PZ-40	22.6 (574)	24.0 (610)	0.50 (12.7)	0.35 (8.9)	39.8 (844)	110 (164)	48 (234)	87.4 (718)	104 (853)	1,049 (43,680)	3.7 (1.13)	1.2 (0.37)

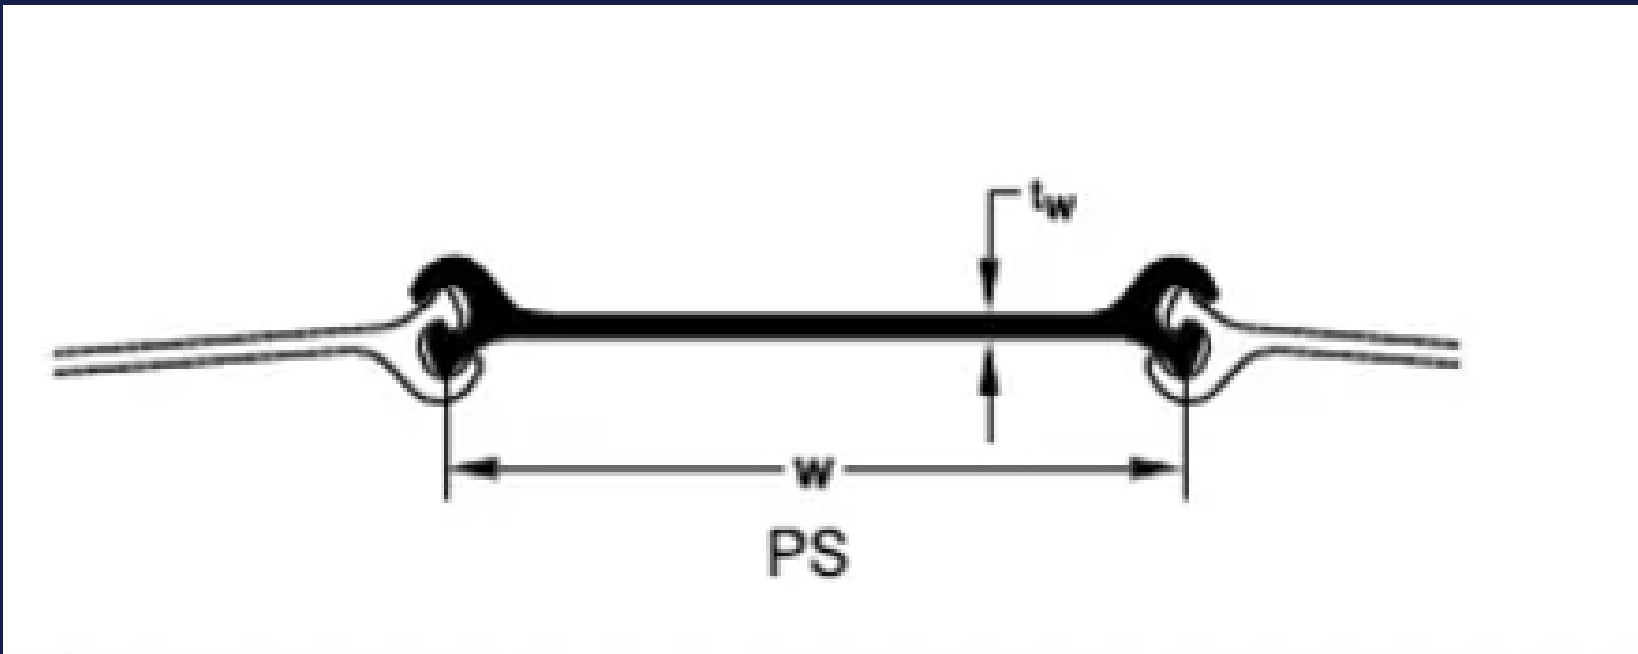

Section	Width (w) in (mm)	Web (tw) in (mm)	Max Interlock Strength	Min Cell Diameter ft (m)	Cross Sectional Area in ² /ft (cm ² /m)	Weight Pile lb/ft (kg/m)	Weight Wall lb/ft ² (kg/m ²)	Elastic Section Modulus in ³ /ft (cm ³ /m)	Moment of Inertia in ⁴ /ft (cm ⁴ /m)	Coating Area Both Sides ft ² /ft (m ² /m)	Coating Area Wall Surface ft ² /ft ² (m ² /m ²)	-
PS 27.5	18.0 (457)	0.42 (10.7)	11.0 (192)	18.0 (5.49)	27.5 (583)	75 (112)	33 (161)	1,065 (17,450)	9,590 (399,000)	3.0 (0.91)	1.1 (0.34)	
PS 31	18.0 (457)	0.50 (12.7)	14.0 (245)	18.0 (5.49)	31.0 (657)	85 (127)	37 (181)	1,200 (19,660)	10,800 (449,000)	3.0 (0.91)	1.1 (0.34)	